



Inverter LED: Off= Inverter off  
On= Inverter on  
Blinking= Search Mode

Fault LED: Off= no issues  
On= inverter fault

ON/OFF Button: Toggles the inverter function on and off the "INV" LED turns on and off with this button

CHANGE Button: Scrolls through the selections available under each menu heading for SETUP and TECH menus

MENU Button: Scrolls through the menu items that help with configuring, monitoring and troubleshooting your inverter charger


HOME Button: Holding the HOME button for 5 seconds exits the setup menus and returns to the status screen

SAVE Button: Saves the changes to settings selected in the Setup Menus

HOLD: Holding the HOLD button for 5 seconds stops/starts the status screen scrolling

## ME-MR25 Functions

# ME-MR MENU MAP

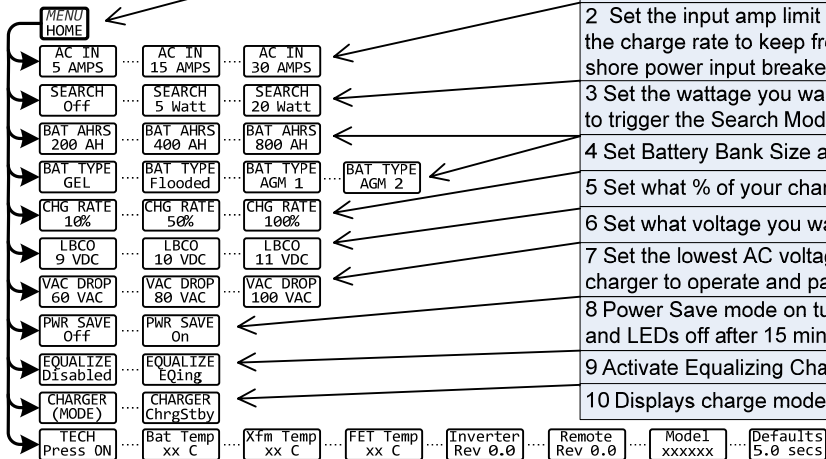

1 Press the Menu button to access the setting you want to access and then press the CHANGE button to set the parameter you want and then press the SAVE button to save the parameter

2 Set the input amp limit to automatically reduce the charge rate to keep from tripping smaller shore power input breakers

3 Set the wattage you want the load to be under to trigger the Search Mode

4 Set Battery Bank Size and Chemistry

5 Set what % of your charger you want to use

6 Set what voltage you want the inverter turn off

7 Set the lowest AC voltage you want the charger to operate and pass through at

8 Power Save mode on turns the backlighting and LEDs off after 15 min without a button push

9 Activate Equalizing Charge Mode

10 Displays charge mode and puts it in standby