



# ME-CB

## Conduit Box



## Installation Guide

Magnum Energy, Inc.  
2211 West Casino Rd.  
Everett, WA 98204  
Phone: 425-353-8833  
Fax: 425-353-8390  
Web: [www.magnumenergy.com](http://www.magnumenergy.com)

# Dimensions/Knockouts

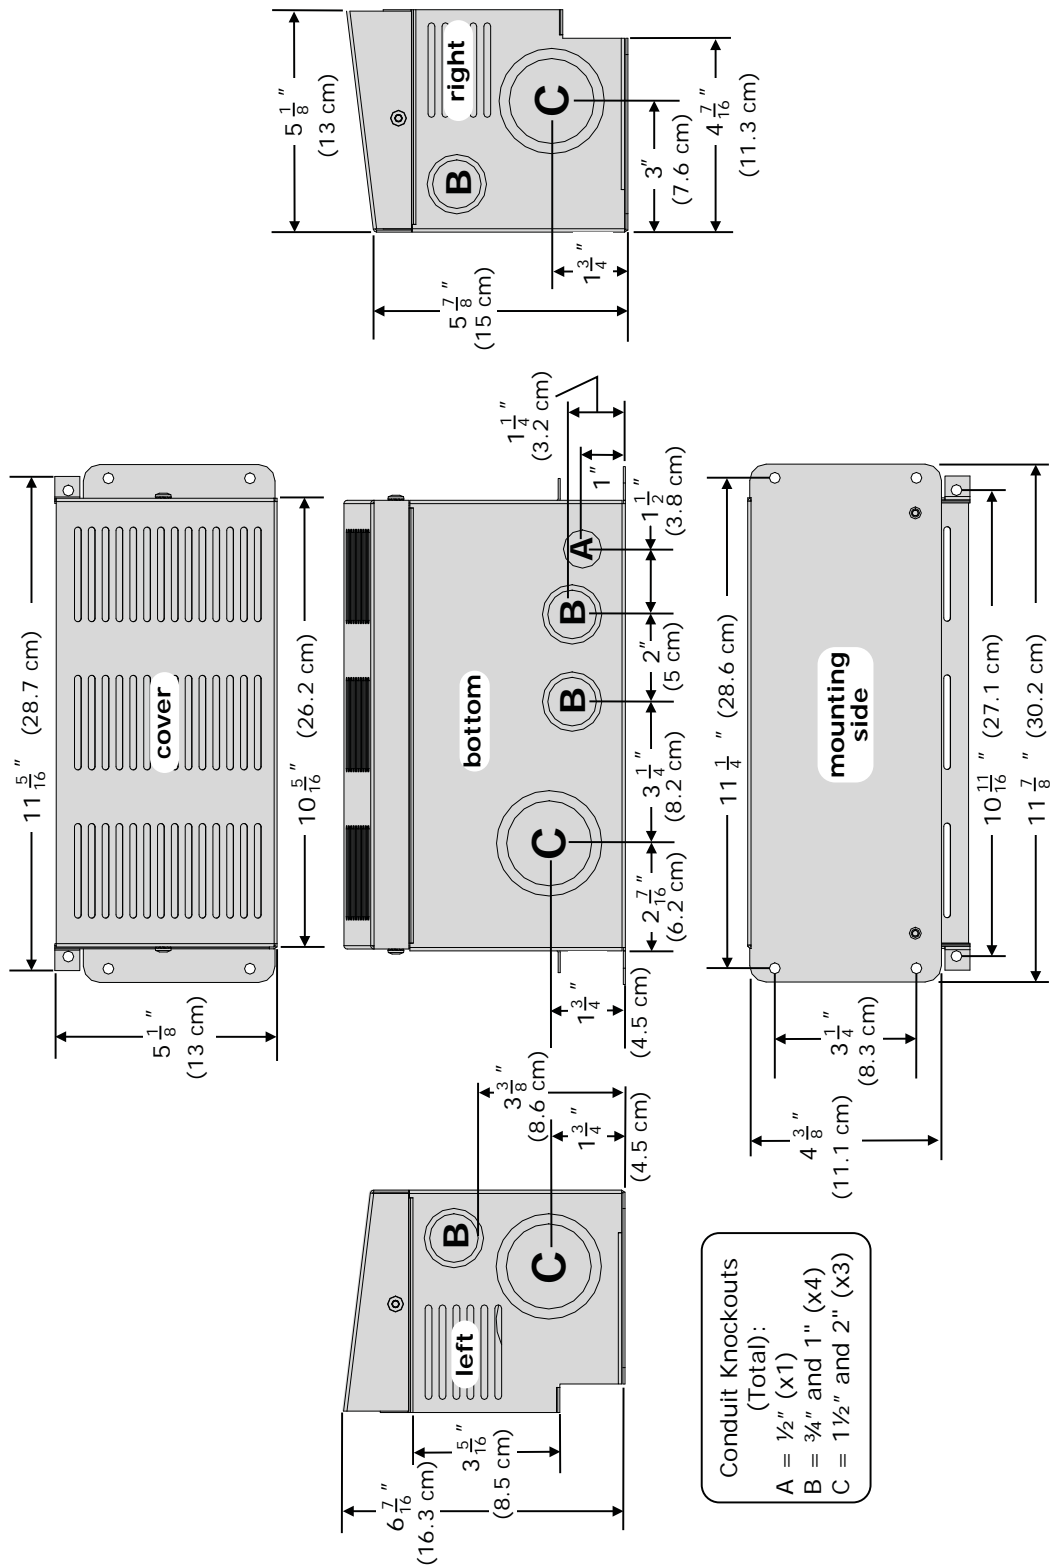


Figure 1, ME-CB Dimensions and Knockouts

## Introduction

The ME-CB conduit box fits on the front side of all large Magnum Energy inverters/chargers, and accommodates installations where the electrical code requires AC and/or DC wiring to be enclosed/protected by conduit.

## Installation



**WARNING:** The inverter uses power from both AC and DC sources. Before beginning this installation, ensure all AC power (utility/generator) and any negative/positive battery cables are safely disconnected from the inverter.

Refer to Figure 2 for the following steps:

1. Detach the conduit box's cover by removing the two #10 - 1/2" Phillips screws that hold it to the conduit box frame.
2. Determine the AC and DC wiring thru the conduit box, and then remove the appropriate knockouts. Attach the corresponding strain reliefs.
3. On the inverter, remove the two #25 Torx screws that hold the inverter cover—both are located on the inverter's front side.
4. Align the conduit box frame with the front side of the inverter, and then place the holding tabs located on each side of the conduit box over the screw openings from which the #25 Torx screws were removed in Step 3.
5. Attach the conduit box frame to the inverter using those same two #25 Torx screws that were removed from the inverter cover (Step 3).
6. Secure the conduit box mounting flanges (x4)—preferably to the same mounting surface used for the inverter.
7. Route the AC/DC wiring through the appropriate knockouts/strain reliefs on the conduit box, and then connect per your inverter's instructions.
8. After ensuring all electrical and hardware connections are correct and secure, attach the conduit box cover to the conduit box frame using the two screws removed in Step 1.
9. Apply power to the inverter and test for proper operation.

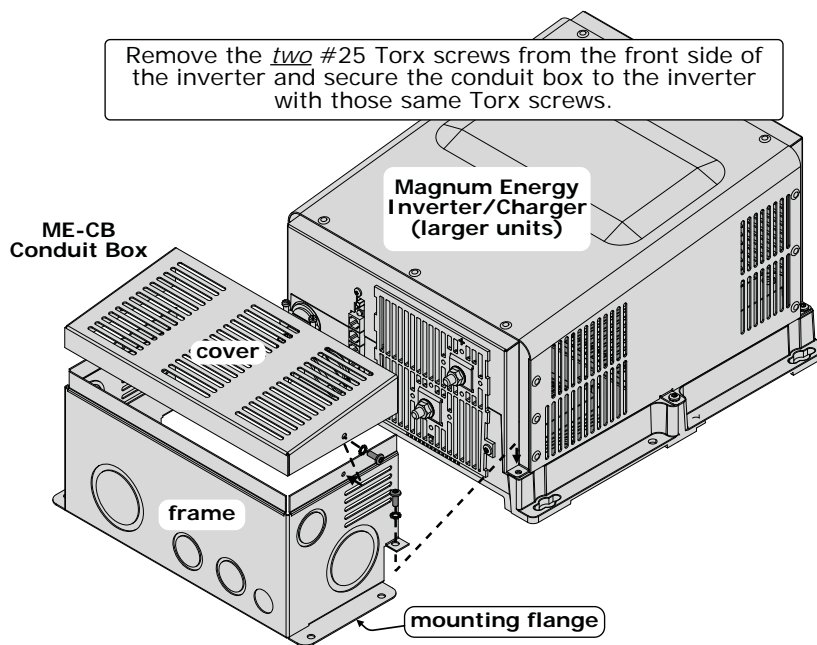


Figure 2, ME-CB Installation

## Warranty and Service

### Limited Warranty

Magnum Energy, Inc. warrants the ME-CB conduit box for a maximum of 12 months from the product's original date of purchase according to the following terms and conditions:

1. The limited warranty extends to the original purchaser of the product and is not assignable or transferable to any subsequent purchaser.
2. During the limited warranty period, Magnum Energy will repair or replace at Magnum Energy's option any defective parts, or any parts that will not properly operate for their intended use with factory new or remanufactured replacement items—if such repair or replacement is needed because of product malfunction or failure during normal usage. The limited warranty does not cover defects in cosmetic appearance, or any decorative, structural, or non-operative parts. Magnum Energy's limit of liability under the warranty shall be the actual cash value of the product at the time the original purchaser returns the product for repair—determined by the price paid by the original purchaser. Magnum Energy shall not be liable for any other losses or damages.
3. Upon request from Magnum Energy, the original purchaser must prove the product's original date of purchase by providing a dated bill of sale or itemized receipt.
4. The original purchaser shall return the product prepaid to Magnum Energy in Everett, WA. After the completion of service under this limited warranty, Magnum Energy will return the product prepaid to the original purchaser via a Magnum-selected non-expedited surface freight within the contiguous United States and Canada; this excludes Alaska and Hawaii.
5. This limited warranty is voided if:
  - the product has been modified without authorization;
  - the product has been damaged through abuse, neglect, accident, or corrosion;
  - the product was not installed according to this installation guide.

### How to Receive Repair Service

If your product requires warranty service or repair, contact either:

- An authorized service center listed on the Magnum Energy website at <http://www.magnumenergy.com/Service/ServiceCenters-US.htm>; or
- Magnum Energy, Inc. at:
  - Telephone: 425-353-8833
  - Fax: 425-353-8390
  - Email: [warranty@magnumenergy.com](mailto:warranty@magnumenergy.com)

If returning the product directly to Magnum Energy for repair, you must:

1. Return the unit in the original, or equivalent, shipping container;
2. Receive a Return Materials Authorization (RMA) number from the factory prior to the return of the product to Magnum Energy;
3. Place the RMA numbers clearly on the shipping container or on the packing slip.

**BEFORE RETURNING ANY UNIT, CONTACT MAGNUM ENERGY FOR A RETURN MATERIAL AUTHORIZATION (RMA) NUMBER**