


ME-AGS-N wiring diagram – For Westerbeke [8.5, 12.5, and 15.0kw BTG(A) Gas Generators]

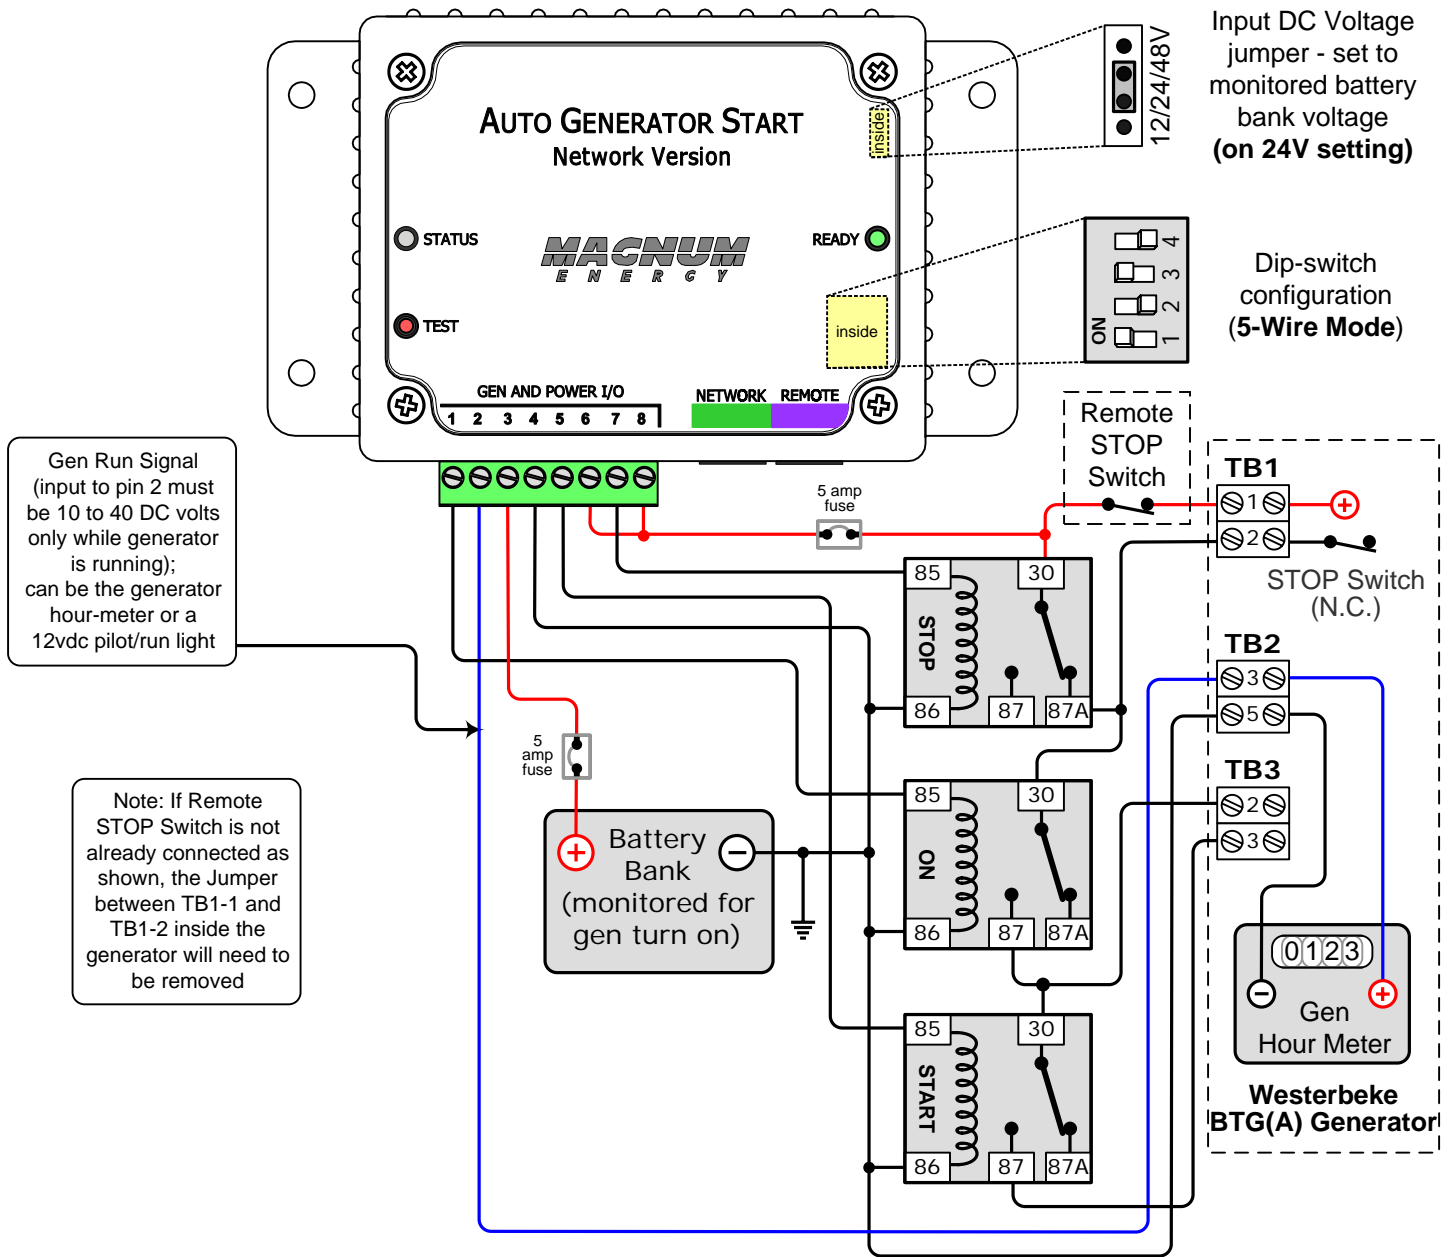

Relays used are SPDT 30 Amp, 12 VDC coil relay; popular in automotive sound and security installations. Equivalent to Bosch #0 332 209 150 or TYCO #V23234-A1001-X036.

ME-AGS-N Relay Timing Information		
<p>GEN AND POWER I/O</p> <p>Relay 1 (terminals 5 & 6) Start</p> <p>Relay 2 (terminals 6 & 7) Stop</p> <p>Relay 3 (terminals 1 & 8) ON</p> <p style="text-align: center;">Start Delay RUN TIME HOURS Stop</p> <p style="text-align: center;">Delay</p>		<p>Stop Time 10 Sec.</p> <p>Start Delay Time 14 Sec.</p> <p>Start Time 10 Sec.</p> <p>Preheat Delay Time 4 Sec.</p> <p>ON Time 25 Sec.</p> <p>Next Retry Time 2 Min.</p> <p>Total Start Attempts 4</p>

Magnum Energy, Inc. provides this diagram to assist in the installation of the Auto-Generator Start controller. Since the use of this diagram and the conditions or methods of installation, operation and use are beyond the control of Magnum Energy, Inc., we do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of the installation, operation and use of this unit.